

HORUS

TUNGSTEN CYCLIGHT 625/1000/1250W



A perfectly even light with no spill

The new RJ cyclight Horus is characterised by an ingenious gel holder system that enables rapid colour changing, without disturbing the fixture's settings and, as an advantage over similar products, it has been specially designed to perform without light spill.

Quick, easy and safe

- Rapid gel changing in any position
- No light spill
- 2 safety switches for secure access to the lamp (hot lead / neutral)
- Unique rear handle design for fast cable changing
- Tip-up protection grid 3mm for easier access to the lamp
- Side tilt adjustment with pointer
- Standard hanging bracket

Use it your way

- 1x4 in-line (850L) or 2x2 square (850C)
- Use as ground row or in hanging position



PRELIMINARY INFORMATION

ROBERT JULIAT

Electrical Data

- Voltage: 220-240 V
- Frequency: 50-60 Hz
- Power: 625 to 1250 W
- 3m 3G1.5 mm² cable
- 10/16 A + E NF/SCHUKO plug

Optional Accessories

- Adjustable mini-bracket for side-by-side assembly
- Set of 2 individual barn doors (vertical or horizontal)


Admissible lamps

LIF code	ANSI code	Power	Voltage	Socket	Colour temperature	Lumen output	Lamp life
P2/10		625W	230/240V	R7s	3200K	16900lm	300h
P2/7	EKM	1000W	230/240V	R7s	3200K	28000lm	300h
K4	DZX	1000W	230/240V	R7s	2900K	21000lm	3000h
P2/12		1250W	230/240V	R7s	3200K	35000lm	300h

Weight and volume

- Weight / unit: 6.5 kg
- Packaging volume: 0.065 m³

Dimensions (mm)

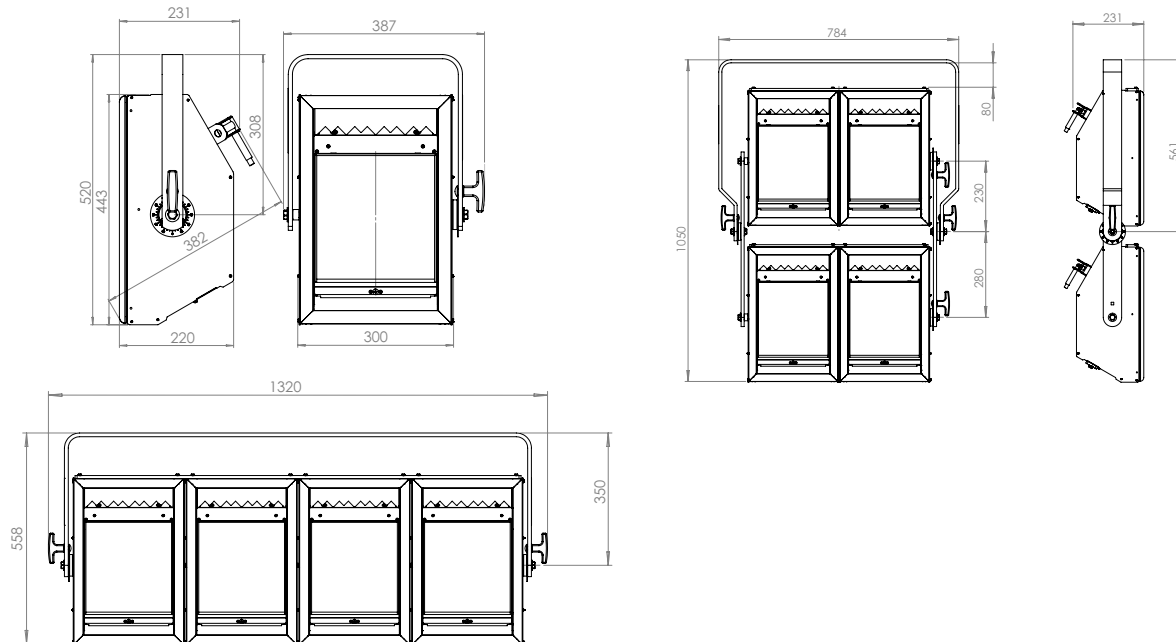

CE

