

ARTHUR - 1014JTCLT

LLT (LED LONG THROW) - LED 800 W



- **Type:** Followspot
- **Source:** LED 800 W
- **Optics:** 4° to 10° zoom
- **Colour temperature:** Cool White
- **Standard:** Japanese

Followspot

The Long Throw 800W LED followspot with narrow beam

Arthur LT is a new Long-Throw adaptation of the original Arthur followspot with a narrower beam. Featuring a zoom range of 4° - 10°, Arthur LT provides an output that exceeds an HMI 2500W Aramis. The LT version ensures invincible performances with an output of 2000 lux at a distance of 50m (200fc at 165 ft), while offering an enhanced light quality with a high CRI (>94) - an essential feature for a followspot whose main role is to shine a light on performers and showcase them in sublime fashion. With the choice of several ventilation modes, Arthur's sound level is much quieter than any of its discharge rivals; it can be operated as easily in opera houses as on concerts and big arenas.

Features

- **Fully closing iris:** control from the top of the unit
- **Gobo holder:** glass and metal gobos
- **Local control:** light intensity adjustment through built-in potentiometer
- **Dimmer control lever on top:** one-handed dim and iris - PTC (Push To Close) model
- **Frost filter:** on flip lever for quick soft-edge beam effect
- **Internal glass filter holder:** long term use of durable coloured, dichroic or textured glass
- **USB connector:** for connection of additional accessories
- **Adjustable response time:** choice of fast or slow dimming for tungsten-like simulation - adjustment by DMX protocol
- **Ethernet-DMX node:** data IN through RJ45 connector; data OUT through DMX for daisy chaining
- **Universal data control:** compatible with DMX, RDM, Art-Net, sACN protocols
- **Remote setup:** all parameters can be adjusted by RDM protocol or by web interface
- **PWM adjustment:** choice of different PWM dimming frequencies - continuous mode available
- **Local setup:** DMX address and mode, dimming curve and response time through 4-button display with automatic light switch-off
- **Control:** local and DMX
- **Dimming parameters:** choice of square or linear dimming curves
- **DMX:** 8 or 16 bit dimming, response time and strobe function
- **Easy focus reference:** graduated scale on side of the unit; fast and easy refocusing
- **Adjustable yoke:** for optimum overhead positioning
- **Stand:** perfectly weighted for maximum stability with smooth rotation for optimum performance. Easy set up; triple safety system for extra security

Optical

- **Long life:** outstanding operational lifetime expectation, no need to replace lamps, low maintenance
- **Native high CRI LED source:** CRI > 94 - perfect for performer illumination - no need for correction filter
- **Gobo :** excellent gobo projection
- **Optical quality:** smooth flat beam, no hot spot
- **Variable zoom optics:** sharp focus at every beam angle. Independent control of image size and focus.
- **Long Throw zoom version:** perfect for long distance applications
- **Electronic dimmer:** dimming without clipping or cut-out at low intensity levels; high quality smoothing
- **No colour shift:** colour temperature remains the same when dimming

Construction

- **Made in France :** fully manufactured in Robert Juliat premises retaining complete control over all aspects of quality
- **PSU:** built-in electronic flicker-free power supply for easy, plug-and-play installation
- **Power connectors:** compatible powerCON® TRUE1 IN and OUT connectors for daisy chaining
- **Integrated network switch :** two etherCON RJ45 connectors for Art-Net / sACN daisy chaining
- **Silent-running cooling fans:** ideal for TV studios and opera houses
- **Electronic thermal management system:** ensures maximum performance of the system without any risk of overheating
- **3 cooling modes available:** includes a silent mode for perfect integration in concert halls
- **Bodywork:** strong sheet metal construction for durability
- **Moving parts:** smooth at all times, even when hot
- **Captive knobs and handles:** additional security when working at height or in transit
- **Fine balance:** precision positioning and smooth operation even with the smallest movements
- **Independent modules for the PSU, drivers and CPU:** easy maintenance with plug & play system

Picture:1014JTCLT

DSEN450_1014JTCLT - 22/06/2026

Robert Juliat reserves the right to change or alter any of the items detailed on this page, to increase or improve manufacturing techniques without prior notice.

Robert Juliat S.A.S., 32 rue de Beaumont, 60530 Fresnoy-en-Thelle - France
Telephone : +33 (0)3 44 26 51 89 - info@robertjuliat.fr - www.robertjuliat.com



ROBERT JULIAT

- Lamp type: LED
- Power: 840 W

LED specifications	Power *	Lumen output*	Colour temperature*	Life*	CRI*
LED 800W LT2	840 W	39 000 lm	7000K	20 000 h	95

(*) manufacturer's data - Life reference: L70B50

Optics

Characteristics


- Type: Zoom
- Range: 4° to 10° (Field angle)
- Focal length: - mm

Gel filter

- Shape: Square
- Standard size: 295x295 mm

Gobo


- Size: B
- Material: Metal Glass




Photometrics (Photometrics report(s) available at the end of the document)

optics: 4°-10° / Standard

• Optics @ 4°

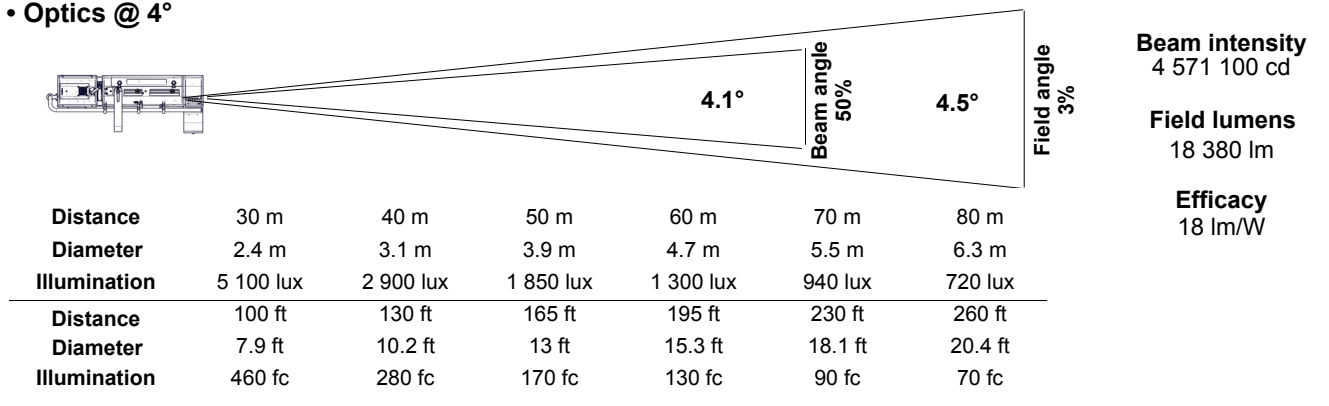

• Optics @ 10°

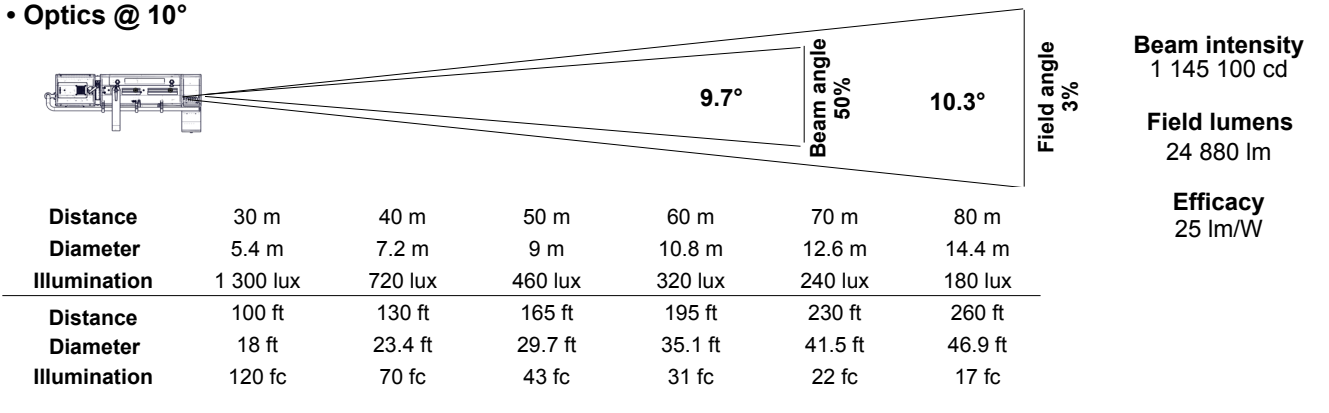

Remote control

- Data protocol: USITT DMX512-A
RDM / Art-Net / sACN


- Data IN connector: 5 pins XLR male + 2x etherCON RJ45
- Data OUT connector: 5 pins XLR female



• DMX chart:

Mode 1 (1 channels)	Mode 2 (2 channels)	Mode 3 (5 channels)	Mode 4 (6 channels)	Mode 5 (6 channels)	Mode 6 (8 channels)
Dimmer	Dimmer Dimmer fine	Dimmer Strobe duration Strobe speed Response time Control mode	Dimmer Dimmer fine Strobe duration Strobe speed Response time Control mode	Dimmer Master dimmer Strobe duration Strobe speed Response time Control mode	Dimmer Dimmer fine Master dimmer Master dimmer fine Strobe duration Strobe speed Response time Control mode

Dimensions and weight

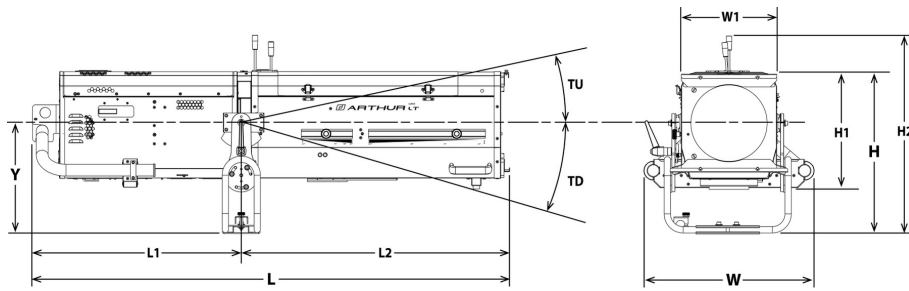

Weight: 65 kg (143 lbs)


Height	Length	Width	Yoke	Tilt
H= 508 mm (20 in)	L= 1496 mm (58.9 in)	W= 536 mm (21.1 in)	Y= 340 mm (13.4 in)	
H1= 373 mm (14.7 in)	L1= 656 mm (25.8 in)	W1= 300 mm (11.8 in)		
H2= 622 mm (24.5 in)	L2= 840 mm (33.1 in)	W2= 361 mm (14.2 in)		

Shipping

- **Weight :** 109 kg (239.8 lbs)
- **Volume :** 1.1 m³ (38.84 ft³)

Installation

- **Minimum distance to illuminated surface:** 1.3 m (4.3 ft)
- **Operating position:**



Construction

- **Housing:** Steel sheet - Aluminium
- **Colour:** Black
- **Cooling:** Variable fans
- **Maximum ambient temperature (Ta):** 40°C (104°F)
- **Maximum case temperature (Tc):** 51°C (123.8°F)
- **Total heat dissipation:** 3 516 BTU/h
- **Ingress Protection (IP) rating:** IP20

Electrical compatibility

- 220/230 V - 50 Hz
- 245 V - 50 Hz
- 110/120 V - 60 Hz
- 208 V - 60 Hz
- 220/230 V - 60 Hz
- 100 V - 50 Hz
- 100 V - 60 Hz
- Selector: automatic detection

Power input



- **Type:** removable power cord with compatible powerCON® TRUE1 connector (included)
- **Cable:** 14 AWG SJ type (UL/CSA)
- **Length:** 1.5 m (4.9 ft)
- **Power connector:** without connector

Power consumption

Voltage	Frequency	Current	Power	Power factor
120 V	60 Hz	8.7 A	1030 W	0.98
230 V	50 Hz	4.3 A	960 W	0.97
100 V	60 Hz	10.7 A	1080 W	0.98

Power Supply Unit

- **PSU:** Internal - Electronic PSU - Flicker free with PFC
- **Control:** Local / DMX
- **Protection:** Mains: 20A 2P 2D fast switch breaker - UL /
- **Power thru:** compatible powerCON® TRUE1 - Maximum of 3 units (230 V) / 1 units (120 V)

Warranty

- **Fixture: 3 years**
See General Sales Condition on website

Approvals




Acoustics

- **Noise level:** < 34,9 dB(A)
















Model



















1014JTCLT	LED 800 W Followspot - 1014JTCLT Arthur - Cool White - 4/10° - Japanese standard
------------------	--

Options

FRO/SMCPV	Heavy duty adjustable yoke equipped with TILT SpotMe sensor (C type)	
------------------	--	---


Accessories

SGUB2	Universal "B" size gobo-holder (metal, glass, frosted glass) 1 included	
FO120R-2	ø120mm 2° frost optical filter with holder 1 included	
GR120/2	Slot reducer for SGUP gobo holder (if PG80/2 option) 1 included	
SAC1	RJ Cable strap (25x500mm) 1 included	
Fusion/RJ	Madrix Radar (RDM monitoring): Fusion RJ licence - access to all RDM parameters of RJ fixtures 1 included	
GT4000	Tripod stand with safety chain - SWL: 130 Kg - max. height: 1030 mm - Weight: 7.91 Kg	
GT4000R	Tripod stand with ball head rotation with security chain - SWL: 130 Kg - max. height: 1030 mm - Weight: 10 Kg	
GT4000RSM	Tripod stand with ball head rotation with security chain and SpotMe PAN sensor - SWL: 130 Kg - max. height: 1030 mm	
GT4000S	Tripod stand without safety chain - SWL: 130 Kg - max. height: 1030 mm - Weight: 8.65 Kg	
JPP	Monopod stand for overhead followspot - Weight: 3.6 Kg	
T4000	Followspot mount for Ø50mm pipe (suspension or overhead) - SWL= 100 Kg - Weight: 4.88 Kg	
T4000RSM	Followspot mount with ball head rotation and SpotMe PAN sensor - SWL = 100 Kg - Weight: 8.53 Kg	
FCM120R/2	Ø120mm 1/2 CTO correction filter (Rosco #3408) with holder	
FO120C-1	120x120mm 1° frost optical filter	
		

FO120C-10	120x120mm 10° frost optical filter	
FO120C-2	120x120mm 2° frost optical filter	
FO120C-5	120x120mm 5° frost optical filter	
FO120R-1	ø120mm 1° frost optical filter with holder	
FO120R-5	ø120mm 5° frost optical filter with holder	
VD120	120x120mm frosted glass	
FRO/SMCPD	Heavy duty adjustable yoke equipped with TILT SpotMe sensor (C type)	
G80/2	Ø80mm horizontal chopper	
BK1	Followspot balancing kit (including 1 Kg counterweights) - Weight: 2.05 Kg	
Kit TELRAD	Telrad followspot sight with raiser and universal mounting kit - Weight: 1.23 Kg	
SDUP	Followspot cue sheet holder with universal mounting kit	
TCSM	SpotMe calibration tool kit	
DMXcat	Bluetooth DMX/RDM Multifunction test tool - City Theatrical DMXcat®	
Fusion/L	Madrix Radar (RDM monitoring): Fusion Large licence - up to 4096 non-RJ RDM fixtures - USB dongle included	 RADAR
Fusion/M	Madrix Radar (RDM monitoring): Fusion Medium licence - up to 512 non-RJ RDM fixtures - USB dongle included	 RADAR
Fusion/S	Madrix Radar (RDM monitoring): Fusion Small licence - up to 64 non-RJ RDM fixtures - USB dongle included	 RADAR
Maestro	Maestro server for SpotMe - rackable unit: 1U - half 19" - Weight: 1.2 Kg	
SMS	SpotMe server + 2 sensor cables + flight case - Weight: 6.2 Kg	

• Optics @ 4°


Field lumens	Beam lumens	Efficacy	Beam intensity	CCT	Delta uv
18 380 Lm		18 Lm/W	4 571 100 Cd	5 620 K	

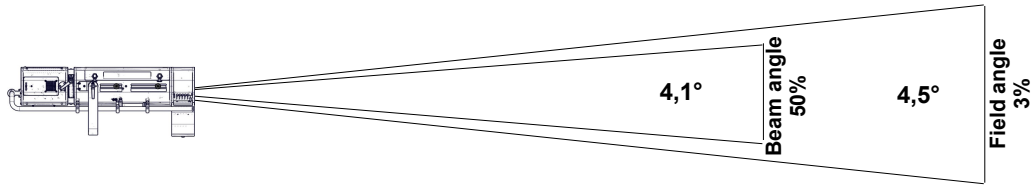

Distance	30 m	40 m	50 m	60 m	70 m	80 m
Field diameter	2,4 m	3,1 m	3,9 m	4,7 m	5,5 m	6,3 m
Illumination	5 100 lux	2 900 lux	1 850 lux	1 300 lux	940 lux	720 lux
Distance	100 ft	130 ft	165 ft	195 ft	230 ft	260 ft
Field diameter	7,9 ft	10,2 ft	13 ft	15,3 ft	18,1 ft	20,4 ft
Illumination	460 fc	280 fc	170 fc	130 fc	90 fc	70 fc

• Optics @ 7,5°


Field lumens	Beam lumens	Efficacy	Beam intensity	CCT	Delta uv
17 180 Lm		23 Lm/W	2 189 200 Cd	5 740 K	

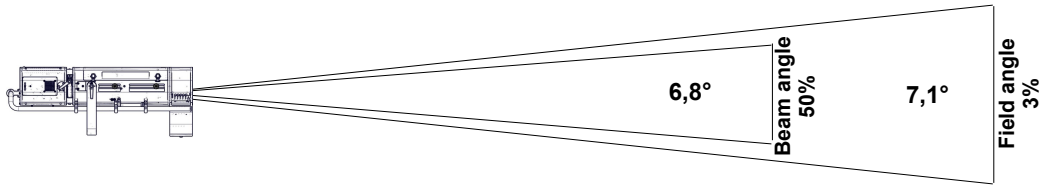

Distance	30 m	40 m	50 m	60 m	70 m	80 m
Field diameter	3,7 m	5 m	6,2 m	7,4 m	8,7 m	9,9 m
Illumination	2 450 lux	1 400 lux	880 lux	610 lux	450 lux	350 lux
Distance	100 ft	130 ft	165 ft	195 ft	230 ft	260 ft
Field diameter	12,4 ft	16,1 ft	20,5 ft	24,2 ft	28,5 ft	32,3 ft
Illumination	220 fc	130 fc	85 fc	60 fc	42 fc	33 fc

• Optics @ 10°

Field lumens	Beam lumens	Efficacy	Beam intensity	CCT	Delta uv
24 880 Lm		25 Lm/W	1 145 100 Cd	5 650 K	

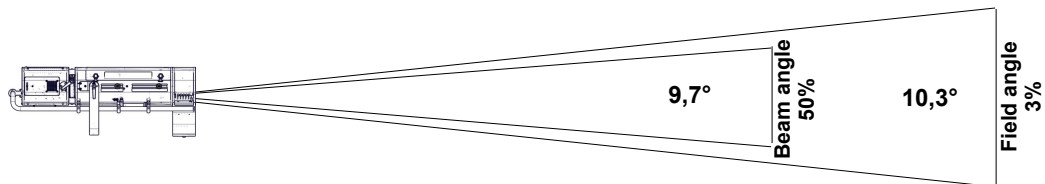


Distance	30 m	40 m	50 m	60 m	70 m	80 m
Field diameter	5,4 m	7,2 m	9 m	10,8 m	12,6 m	14,4 m
Illumination	1 300 lux	720 lux	460 lux	320 lux	240 lux	180 lux
Distance	100 ft	130 ft	165 ft	195 ft	230 ft	260 ft
Field diameter	18 ft	23,4 ft	29,7 ft	35,1 ft	41,5 ft	46,9 ft
Illumination	120 fc	70 fc	43 fc	31 fc	22 fc	17 fc

Light quality report

CCT	DeltaUV	CRI Ra	CRI R9	CQS Qa	TM30-18 Rf	TM30-18 Rg	TLCI	SSI [D5775]
5 580K	0.0016	94	81	92	92	101	96	74

CRI - CIE Colour Rendering Index

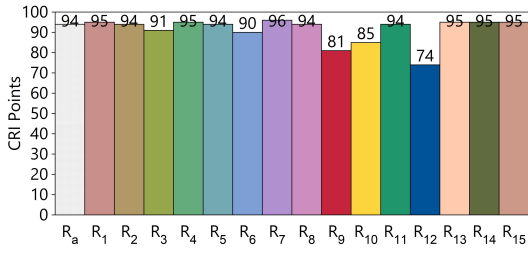


TLCI - Television Lighting Consistency Index







Spectre : CCT = D5775 (-0.3)
 TLCI-2012 : 96 (D5775)



CQS - NIST Colour Quality Scale

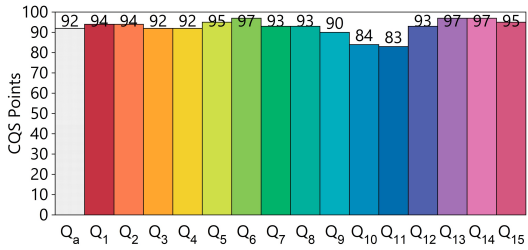

ANSI/IES TM-30-18 Colour Rendition Report

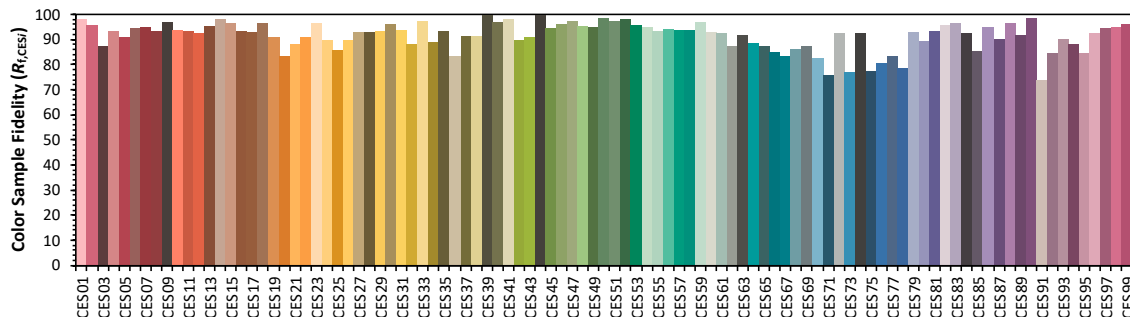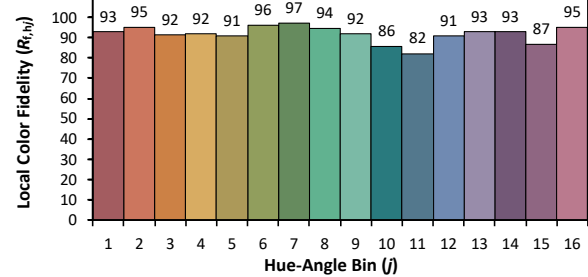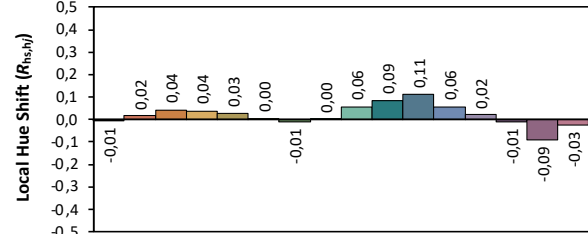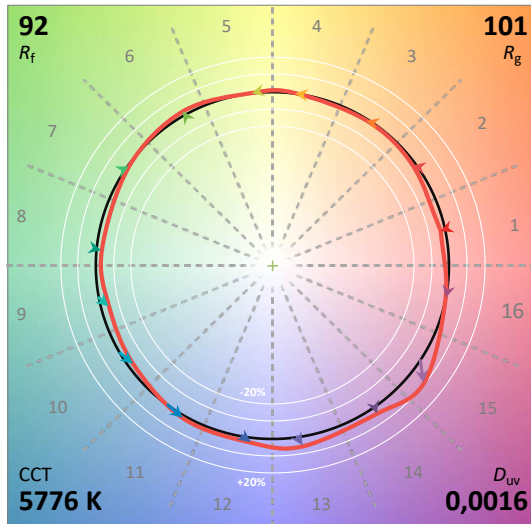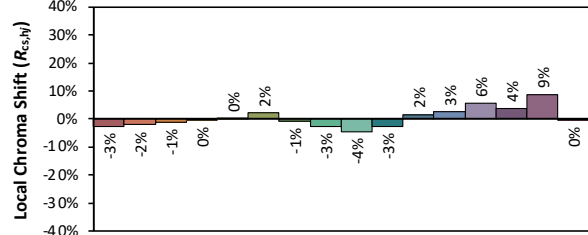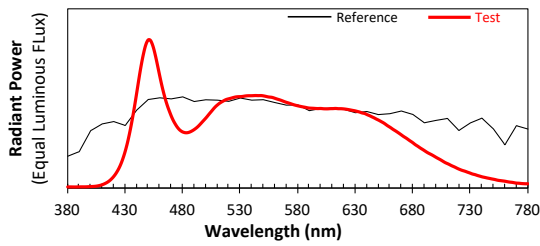

Colours are for visual orientation purposes only. Created with the IES TM-30-18 Calculator Version 2.00